#### PROFESSIONAL PULSEWAVE BLOOD PRESSURE MONITORS



**Professional Mobile Blood Pressure Monitor RBP-6700** 

















# **Innovative PulseWave Cuff**

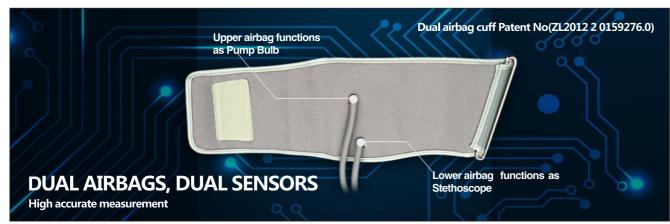

# **Innovative PulseWave Waveform**



Pulse wave signal appearing indicates SBP

Stable speed of pulse wave indicates DBP

TETT TI SO WEET O

### **GLOBAL INVENTION PATENTS**



- · Advanced Using innovative patent dual-balloons/air-tubes/sensors technology (instead of other single balloon/sensor ordinary digital blood pressure devices) and continuous measurement of multi-point pressure between pulses to achieve the most accurate measurement during the record of accurate real state of blood flow. Over 40 countries invention patent applied.
- Reliable ±3mmHg high accuracy. It imitates Mercury Blood Pressure Monitor, the upper airbag functions as pump bulb for adding pressure, the lower airbag functions as Stethoscope to detect real state of blood flow via pulse wave.
- Pocket-Size Design

Easy to carry, especially convenient for doctors and nurse to check the wards.

High Capacity Li Battery

300 measurements can be executed once full charging.

• Large Capacity Chip

Store 100 sets of data

• Easy Sync of Data

Support Bluetooth and USB to transfer data

• Large Backlight screen for Easy reading. Human Voice Prompts

## **Specification**

•	
Model	RBP-6700
Measurement Principle	PulseWave Innovative Technology ( not Oscillometric method )
Display	Backlight screen for easy reading
Measurement Range	Pressure: 0~270 mmHg ( 0~36 kPa) Pulse Rate: 40~180/min
Accuracy	Pressure: ±3 mmHg ( ±0.04 kPa) Pulse Rate: ±5%
Memory Storage	100 sets
Power Supply	DC 3.7V (Li Battery)
Applicable Arm Circumference	M: 23-32cm L: 33-42cm( extra charge)
Data Transmission	Bluetooth and USB
Operating Temperature/ Relative Humidity/ Air Pressure	41~104°F (5~40°C ) / 15%~80%RH / 80~106 kPa
Storage and Transportation Temperature/Relative Humidity/Air Pressure	-7.6~131°F (-20~55°C) / ≤93%RH / 50~106 kPa
Main Unit Weight	260g (not Including battery)
Main Unit Size	201.8(L)*52(W)*50(H) mm
Package Details	12pcs/CTN Size: 52*43*35cm Gross Weight: 9.5kg
Shock Protection	BF Type